

尺寸: 97(L) x 135(W)mm

材质: 128g 双铜纸

色彩: 彩色印刷

装订方式: 风琴折


封面

封底

LINDU


QUICK START GUIDE

Wire-free Camera

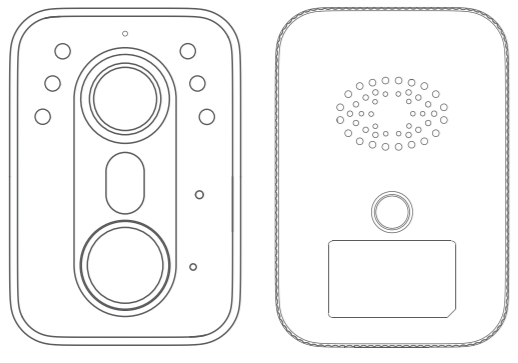


1/ Getting Started


For Indu Cam installation




Indu Cam




Type-C-USB Charging Cable




Wall Mount



Card Pin



Mounting Screws and Anchors




Quick Steup Guide

Camera quantity and accessories vary by bundle package.


2/ Product Overview

Indu Cam

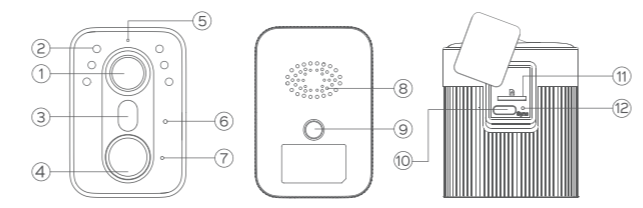

1. Lens	5. Indicator light	9. Mounting hole
2. Infrared light	6. Light-sensitive	10. Type-c interface
3. White light	7. Microphone	11. SD card slot
4. Motion Sensor	8. Speaker	12. Sync

Status and Indicator

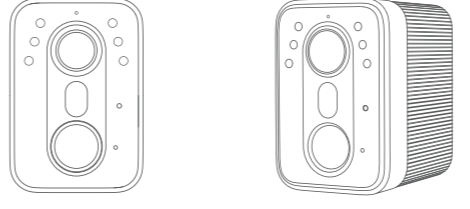


Device Status	Button	Indicator Light	Voice
Power On	Long press for three seconds to switch on the machine when it is off.	Red light blinking	Sound of camera start
Power Off	Five short presses in a row.	Lights all off	Sound of camera shutdown
Reset	In the power-on state long press for five seconds to restore the factory and enter the distribution network	Red light blinking	Restore factory settings-waiting for the WiFi
Upgrade	/	Green light blinking	The system is being upgraded, please wait a moment
Connect the WiFi successful	/	Green light stays on	Connect the WiFi successful
Connect the WiFi failed	/	Red light blinking	Connect the WiFi failed
Charging (Device Light)	/	White light always on	/
Charged (Device Light)	/	White lights off	/


3/ Setting Up The System

Download the App and Set up the System

- Please fully charge the battery before using it for the first time.
- Download the Cldbus App from the App Store (iOS devices) or Google Play store (Android devices).




- Register an account if you are using the APP for the first time.
- Make sure that your smartphone is connected to your wireless router (It has to be on the 2.4GHz channel if you have a dual-band router)

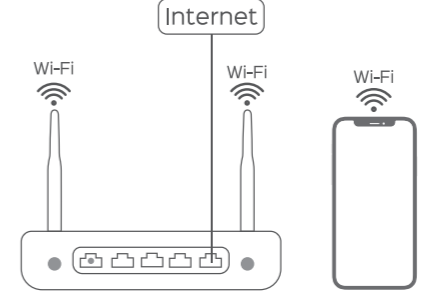


2.4G WiFi Battery Camera:CL01
 Warranty: 12 months limited warranty
 Email us: service@lindu.us
 website: www.lindu.com

Make sure power is on




Add device of Inducam (Indu Cam)

- On the first page, click the + sign to add a device, select 'Smart Camera (Battery)' and click to continue on the next page. (Please make sure InduCam is on)




Complete to set up the system


- Scanning for nearby devices, please ensure that the device has been awakened and the password keyboard is on.



- Select the network and enter the password (please use 2.4GWIFI), wait for the network to succeed.




- Now the device is being added, after the successful addition of the device, the voice will announce that the connection to WiFi is successful and the green light is always on.




4/ Mounting The Camera

Mount to any flat surface
Mount onto the wall


- Please adjust the angle of the ball head bends before you mount. Drill holes with a 15/64 inch(5.95mm) drill bit then insert the anchors into the holes; anchors are necessary for walls that are made out of hard materials such as concrete, brick or stucco.

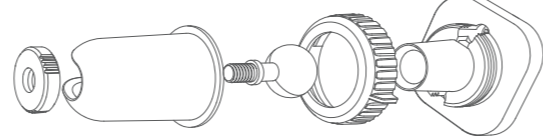


- Firmly secure the base onto the wall using 3-5 screws(depends on actual wall mount) supplied in the package. Then tighten the camera to the mounting bracket and let metal head firmly screw the camera.

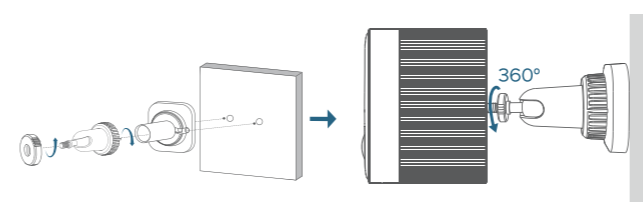

- It is suggested to install Indu cam 7-10 ft (2-3 m) above the ground. This height maximizes the detection range of the motion sensor of Inducam. Avoid placing Inducam under direct sunlight.

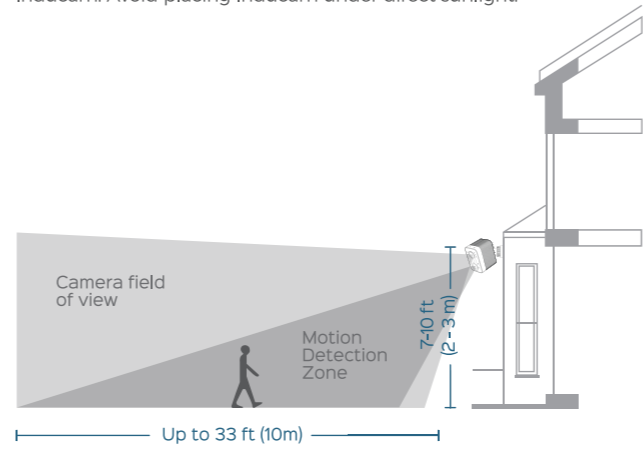

5/ charge Inducam

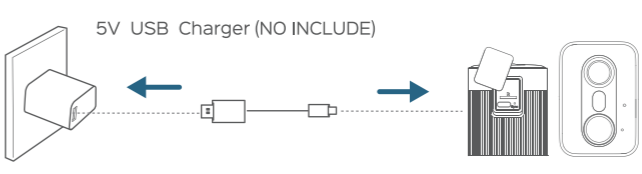

6/ Disclaimer

The contents in this manual, product specifications, size, and shape are subject to change without prior notice. The manufacturer makes no representations or warranties concerning the contents hereof and reserves the right to revise this manual without obligation to notify any person. The manufacturer shall not be liable for any technical or editorial errors or omissions contained in this manual, or for any damage, direct or indirect, for financial losses or claims from third persons resulting from the use of this product and any of its functions. The total accessible capacity varies depending on the operating environment. All references to speed are for comparison purposes only. Actual data throughput may vary.

7/ FCC Warning

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.